


Channel Fitting Installation Manual

Features:

- Can be combined with rigid pipes that comply with CNS, JIS, ASTM, and BS specifications
- Easy installation and disassembly
- Can be installed and used repeatedly
- Quakeproof and highly flexible
- Pressure resistance 15kgf/cm²
- Applicable pressure 7.5kgf/cm²


Steps:

1

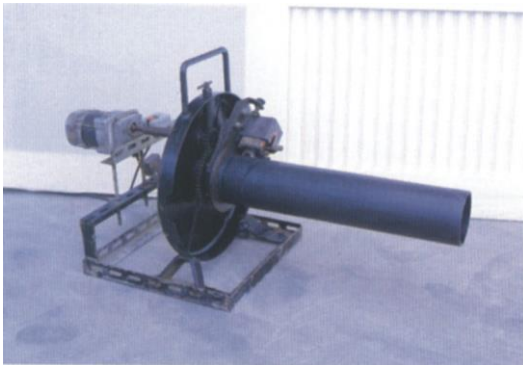

Use a special ditch scraper to cut and scrape the pipe end.

2

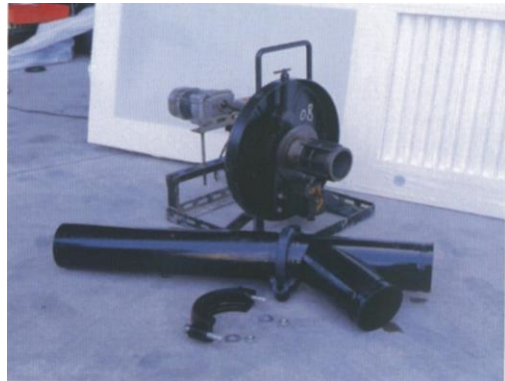

Put the water-stop rubber into any joint first, and adjust the position, approximately between the channels of the two joints.

3 Insert the cover and tighten the screws until the two covers are matched.

